




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H01Q 1/24, 9/16	A1	(11) International Publication Number: WO 00/28617 (43) International Publication Date: 18 May 2000 (18.05.00)
<p>(21) International Application Number: PCT/US99/26098</p> <p>(22) International Filing Date: 4 November 1999 (04.11.99)</p> <p>(30) Priority Data: 09/189,890 11 November 1998 (11.11.98) US</p> <p>(71) Applicant: ERICSSON, INC. [US/US]; 7001 Development Drive, Research Triangle Park, NC 27709 (US).</p> <p>(72) Inventors: SADLER, Robert; 1507-515 Woodway Club Drive, Durham, NC 27713 (US). SPAIL, Jim; Apartment 104, 400 Pecan Bend, Bedford, TX 76022 (US).</p> <p>(74) Agent: COATS & BENNETT, P.L.L.C.; P.O. Box 5, Raleigh, NC 27602 (US).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>	

(54) Title: **DIPOLE ANTENNA CONFIGURATION FOR MOBILE TERMINAL**

(57) Abstract

The present invention provides an internal antenna for mobile terminals that provides performance comparable with externally mounted antennas. The antenna is of a looped dipole configuration wherein the resonating elements of the antenna are integrated within or located on an inside or outside surface of the terminal's housing. The looped-shaped resonating elements may be placed around other components of the phone without significantly infringing on precious, physical space. For example, the loop elements may be placed around the keypad, around the display, around any portion or outline of the housing, and in a flip portion hingeably engaging a main portion of the housing. Preferably, the antenna is a two-sided, half-wave antenna having two rectangular-shaped loop dipole elements.

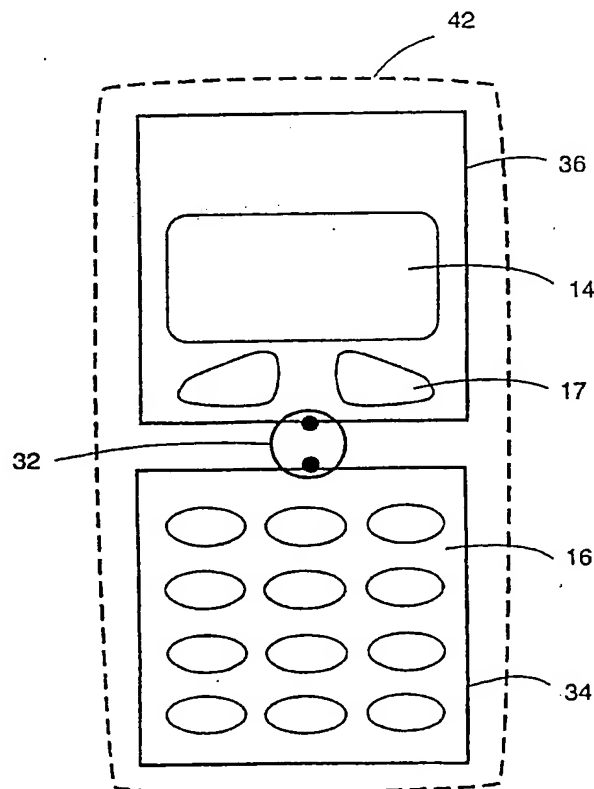

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DIPOLE ANTENNA CONFIGURATION FOR MOBILE TERMINAL

Background of the Invention

5 The present invention relates to mobile terminals for use in analog and digital-based cellular communication systems, and, in particular, to an improved antenna configuration therefore. For clarity, the specification assumes that such mobile terminals include wireless communication devices, such as personal communication assistants, pagers, headsets, wireless modems, analog and
10 digital cellular telephones, and the like, which are configured to operate in a wireless communication system where mobile terminals communicate via terrestrial and satellite base stations to any number of telephony systems.

Mobile terminals, and especially mobile telephones and headsets, are becoming increasingly smaller. These terminals require a radiating element or
15 antenna for radio communications. Conventionally, antennas for such terminals are attached to and extend outwardly from the terminal's housing. These antennas are typically retractably mounted to the housing so that the antenna is not extending from the housing when the terminal is not in use. With the ever decreasing size of these terminals, the currently used external antennas become
20 more obtrusive and unsightly, and most users find pulling the antenna out of the terminal housing for each operation undesirable. Furthermore, these external antennas are often subject to damage and breakage during manufacture, shipping and use. The external antennas also conflict with various mounting devices, recharging cradles, download mounts, and other cooperating
25 accessories.

Thus, it would be beneficial if the external, outwardly extending antennas used for existing mobile terminals were replaced with an internal antenna providing comparable performance for both single and dual-mode operation. An internal antenna would require generally omni-directional performance without
5 being affected by the terminal's electronics and analog and digital ground planes.

Summary of the Invention

The present invention provides an internal antenna for mobile terminals that provides performance comparable with externally mounted antennas. The
10 antenna is of a looped dipole configuration wherein the resonating elements of the antenna are integrated within or located on an inside or outside surface of the terminal's housing. The looped-shaped resonating elements may be placed around other components of the phone without significantly infringing on precious, physical space. For example, the loop elements may be placed
15 around the keypad, around the display, around any portion or outline of the housing, and in a flip portion hingeably connected to a main section of the housing. Preferably, the antenna is a two-sided, half-wave antenna having two rectangular-shaped loop dipole elements.

Accordingly, the present invention relates to a mobile terminal with a non-
20 obtrusive antenna, including communication electronics facilitating wireless communications, a housing enclosing the communication electronics, a dipole antenna having two resonating loop elements, and an antenna feed coupling the loop elements to the communication electronics. Each of the resonating loop elements is integral with and attached at substantially all points to a portion of
25 the housing wherein the antenna does not substantially extend outward from the

housing. Preferably, the antenna is either embedded in the thickness of the housing, attached to an inner surface of the housing, or attached to an outer surface of the housing.

Furthermore, additional conductive elements may be placed along the housing to provide tuning traces as well as an additional dipole antenna configured for operation at a different frequency than the first antenna. The terminal may be a single-body housing or a flip-type housing wherein one of the antenna loop elements is placed in the flip portion and the other element is placed in the main body of the housing. These and other aspects of the present invention will become apparent to those skilled in the art after reading the following description of the preferred embodiments when considered with the drawings.

Brief Description of the Drawings

FIGURE 1 is a block schematic of mobile terminal electronics including optional terminal features.

FIGURE 2 is a front view of a telephone embodiment of a mobile terminal having an antenna constructed according to the present invention.

FIGURE 3 is a mobile terminal having two dipole antennas for dual-frequency operation constructed according to the present invention.

FIGURE 4 is a mobile terminal having additional antenna elements associated with and/or connected to elements of the dipole antenna according to the present invention.

FIGURE 5 is a front view of a top-mounted, flip-type mobile telephone wherein the dipole antenna is mounted along the front face of the telephone housing.

FIGURE 6 is a back view of a top-mounted, flip-type mobile telephone wherein the dipole antenna is mounted along the back face of the telephone housing.

FIGURE 7 is a front view of a bottom-mounted, flip-type mobile telephone shown in an open configuration with the antenna element mounted along the front face of the telephone housing.

FIGURE 8 is a front view of a bottom-mounted, flip-type mobile telephone shown in a closed configuration with the antenna element mounted along the front face of the telephone housing.

FIGURE 9 is a back view of a bottom-mounted, flip-type mobile telephone shown in an open configuration with the antenna element mounted along the back face of the telephone housing.

FIGURE 10 is a cross-sectional view of a mobile terminal housing depicting the various mounting locations provided by the present invention.

FIGURE 11 is a perspective view of a mobile terminal housing wherein the loop elements of the dipole antenna conform about multiple sides of the terminal housing according to the present invention.

FIGURE 12 is a schematic diagram of a loop dipole antenna having an additional tuning loop according to the present invention.

FIGURE 13 is a schematic diagram of a loop dipole antenna having additional tuning loops according to the present invention.

Detailed Description of the Preferred Embodiments

In the following description, like reference characters designate like or corresponding parts throughout the several figures. It should be understood that

the illustrations are for the purpose of describing preferred embodiments of the invention and are not intended to limit the invention thereto.

With reference to Figure 1, a schematic overview of a mobile terminal 10 is shown having various optional components. Generally, the terminal 10 will include a control system 12 associated with one or more of the following: a display 14, keypads 16, 17, auxiliary I/O device 18, or printer 20. As noted, each of these components are optional, and various ones or combinations thereof are present in different applications of a mobile terminal. For example, a telephone configuration will generally include a display 14 and one or more keypads 16. Auxiliary I/O 18, printing capability and any other desired features are optional.

The control system 12 is further associated with the necessary radio communication electronics 22, which invariably include a receiver and transmitter (except in certain pager applications) for providing wireless communications with other terminals or telephony systems directly or through base stations. In telephone embodiments, the radio communication electronics are associated with a microphone 24 for receiving audible voice signals and a speaker 26 to acoustically reproduce audible signals for the user.

The radio communication electronics 22 are associated with one or more dipole antennas 30 having two loop-shaped, resonating antenna elements. The first antenna element, which is coupled to the radio frequency signal transmission path 38, is referenced as RF loop 34, and the element associated with ground path 40 is referred to as ground loop 36. Each loop element 34, 36 is electrically coupled to the respective transmission path 38 or ground 40 via antenna feed 32.

With reference now to Figure 2, a telephone embodiment of a mobile terminal is shown with an integral dipole antenna depicted along the front face of housing 42. The front face includes keypad 16 and display 14 wherein the RF loop 34 surrounds the lower keypad 16, and the ground loop 36 surrounds the upper keypad 17 and display 14. Preferably, the RF and ground loops 34, 36 are configured to provide a half-wave dipole antenna. The elements forming the RF and ground loops 34, 36 may be placed on an outside or inside surface of the housing 42 or integrally molded within the housing wall between the outside and inside housing surface. The loop configuration of the antenna elements enhances performance of the antenna near ground planes found in the printed circuit boards making up the terminal's electronics.

In addition to placing the antenna loops on the front of a mobile terminal, virtually any surface of the mobile terminal may be used, including the back surface as shown in Figure 3. Furthermore, an additional antenna having an RF loop 44 and a ground loop 46 may be placed on the terminal housing 42. The additional antenna may use the same or a different antenna feed 32. The RF and ground loops 44, 46 of the additional antenna will preferably be sized accordingly to provide a half-wave dipole antenna at an operating frequency different from the operating frequency for which the first antenna is configured. As such, any terminal can be configured for multi-band performance. Notably, any additional antennas and associated loop elements may be placed along any portion of the terminal housing 42 as long as the basic dipole configuration is maintained. For example, the antennas may be substantially concentrically aligned as shown in Figure 3 or one antenna may be placed along one surface while the other antenna is placed on an adjacent or opposing surface.

Furthermore, the loop elements of either antenna in a multi-band configuration may share portions of antenna elements or be configured completely exclusive to one another.

Turning now to Figure 4, conductive tuning elements 50 are strategically placed for tuning and multi-band operation. These additional elements 50 may be electrically coupled to one or more points of one of the RF or ground loops 34, 36 or may be electrically isolated therefrom. These tuning elements 50 may be used to compensate for the shape or location of the antenna loops or the effects of components of the mobile terminal on antenna performance.

The integral dipole antenna of the present invention is particularly useful with flip-type mobile terminals. As shown in Figure 5, a flip-type telephone embodiment includes a housing 42 with a main body 52 and a flip portion 54 hingeably connected to the main body 52. The RF loop 34 is provided on the main body 52 while the ground loop 36 is provided on the flip portion 54. In the stowed position, where the main body 52 and flip portion 54 are folded against each other (not shown), the antenna acts as a quarter-wave loop with degraded performance. When the flip portion is open, the loop dipole antenna is active. Figure 6 shows an alternative embodiment of a flip-type telephone of Figure 5 wherein the RF and ground loops 34, 36 forming the dipole antenna are located on the back of housing 42. The flip-type telephone shown in Figures 5 and 6 is typically referred to as top-mounted flip designs.

Figures 7, 8 and 9 disclose a bottom-mounted flip-type telephone. Again, one antenna loop is placed on the main body 52 and the other loop is placed on the flip portion 54 of housing 42. Notably, either the RF or ground loop 34, 36 may be placed on either one of the main body 52 or flip portion 54. As with the

other embodiments, the RF and ground loops 34, 36 may be placed on the front (Figures 7 and 8), on the back (Figure 9), or along any other part of housing 42.

Again, when the flip portions 54 having one of the RF or ground loops 34, 36 are open, full half-wave dipole antenna performance is achieved. When the flip

5 portion 54 is closed against the main body 52, degraded quarter-wave performance is provided. Notably, the performance of the quarter-wave antenna is sufficient to at least initiate communications, such as receiving basic control signals from area base stations.

Figure 10 depicts a cross section of a housing 42 and identifies the
10 various places along which a conductive element of an antenna loop or tuning element may be placed. Any such element may be placed on an inside surface of the housing 42 (60), within the housing 42 (62), or on an outside surface (64) of housing 42. Regardless of the placement along the housing, the traces may travel anywhere along housing 42 and about any components mounted thereto.
15 Furthermore, as shown in Figure 11, any of the antenna elements, including tuning elements 50, may take on a variety of shapes and follow a variety of contours, edges, or shapes provided by housing 42. The embodiment in Figure 11 is exemplary of RF and ground loops 34, 36 following the elongated, rectangular housing depicted. Although the loop and tuning elements are shown
20 as being linear in the drawing figures, any of these elements may curve in any variety of ways in order to accommodate the shape of the housing, placement of components on the housing, and provide desired performance. The antenna loops are preferably substantially rectangular, but may take on any looped structure, including symmetrical and asymmetrical elliptical and circular shapes.

Additional loop elements 66 may be used to electrically couple the RF and ground loops 34, 36 to create a tuning loop, which may be used to tune the antenna to a desired frequency as well as provide reception characteristics sufficient to receive signals at multiple frequencies for multi-band performance.

- 5 The tuning loop element 66 may be coupled to the ground and RF loops 34, 36 at various points for additional tuning. Additional loop elements 66 may be provided as shown in Figure 13 for further tuning and impedance matching.

Any of the conductive elements forming the antenna loops or any of the tuning elements can be photo etched, plated or silk screened onto the terminal housing. Alternatively, such elements can be a conductive wire or trace that is
10 molded or embossed within or into the housing. The loop elements and tuning elements may be symmetrical or asymmetrical for varied tuning effects. Each of these elements will include a sufficient dielectric layer to prevent direct contact of any conductive element. Furthermore, the components, which any loop is
15 associated with or surrounds, may include a dielectric that can be varied to further affect tuning. For example, the dielectric of a keypad may be modified to affect tuning for an antenna loop proximate thereto.

Those skilled in the art will recognize variations on the themes disclosed herein. Such themes are considered within the scope of the disclosure and the
20 claims that follow. As such, variations obvious to those skilled in the art relating to integrating a looped dipole antenna in or to a terminal housing to provide high-performance reception and transmission in close proximity to a ground plane is considered within the scope of the present invention. Certain modifications and improvements will occur to those skilled in the art upon reading the foregoing
25 description. It should be understood that all such modifications and

improvements have been omitted for the sake of conciseness and readability, but are properly within the scope of the following claims.

We claim:

1. A mobile radio communication device comprising:

a. communication electronics for engaging in wireless

communications;

b. a housing enclosing said communication electronics; and

c. a dipole antenna having two resonating loop elements and an antenna feed coupling said loop elements to said communication electronics, each said resonating loop element being integral with and conforming to said housing.

2. The mobile terminal of claim 1 wherein said resonating loop elements are positioned adjacent one another and along said housing in a dual-sided, looped dipole antenna configuration.

3. The mobile terminal of claim 1 wherein said housing includes a main body and a flip portion pivotally connected to said main body, wherein said flip portion is moveable between a first position extending outward from said main body and a second position against said main body, one said loop element being integral with and conforming to said main body and the other said loop element being integral with and conforming to said flip portion such that a dual-sided, looped dipole antenna configuration is formed when said flip portion is in said first position.

4. The mobile terminal of claim 1 wherein said loop elements are substantially rectilinear.

5. The mobile terminal of claim 1 wherein said housing includes a user interface and wherein one said loop element encircles at least a portion of said user interface.

6. The mobile terminal of claim 5 wherein said user interface includes
5 a keypad and wherein one of said loop elements extends around said keypad.

7. The mobile terminal of claim 5 wherein said user interface includes a display and wherein one of said loop elements extends around said display.

8. The mobile terminal of claim 2 wherein said housing includes a front surface and wherein both of said loop elements are disposed along said
10 front surface of said housing.

9. The mobile terminal of claim 2 wherein said housing includes a back surface and both of said loop elements are disposed along said back surface of said housing.

10. The mobile terminal of claim 2 wherein one of said loop elements is
15 disposed along a front surface of said housing and the other of said loop elements is disposed along a back surface of said housing.

11. The mobile terminal of claim 3 wherein said housing includes a main body and a flip portion pivotally connected to said main body, and wherein one of said loop elements is disposed on said main body and the other of said
20 loop elements is disposed on said flip portion.

12. The mobile terminal of claim 1 wherein said loop elements conform to an outer surface of said housing.

13. The mobile terminal of claim 1 wherein said loop elements conform to an inner surface of said housing.

14. The mobile terminal of claim 1 wherein said loop elements are encapsulated within a wall forming a portion of said housing.

15. The mobile terminal of claim 14 wherein said loop elements are molded into said housing.

5 16. The mobile terminal of claim 1 wherein said loop elements are substantially symmetrical.

17. The mobile terminal of claim 1 wherein said loop elements are asymmetrical.

10 18. The mobile terminal of claim 1 wherein an additional antenna element is electrically coupled to at least one said loop elements to affect antenna tuning.

19. The mobile terminal of claim 18 wherein an additional antenna element is electrically coupled between said loop elements to affect antenna tuning.

15 20. The mobile terminal of claim 18 wherein said loop elements are substantially rectilinear and said additional antenna element provides a tuning loop affecting antenna tuning.

20 21. The mobile terminal of claim 1 further comprising a second dipole antenna having two resonating loop elements and an antenna feed coupling said loop elements of said second dipole antenna to said communication electronics, each said resonating loop elements being integral with said housing, wherein said first and second dipole antennas are configured to operate at different frequencies.

25 22. The mobile terminal of claim 21 wherein said first and second dipole antennas are concentrically arranged.

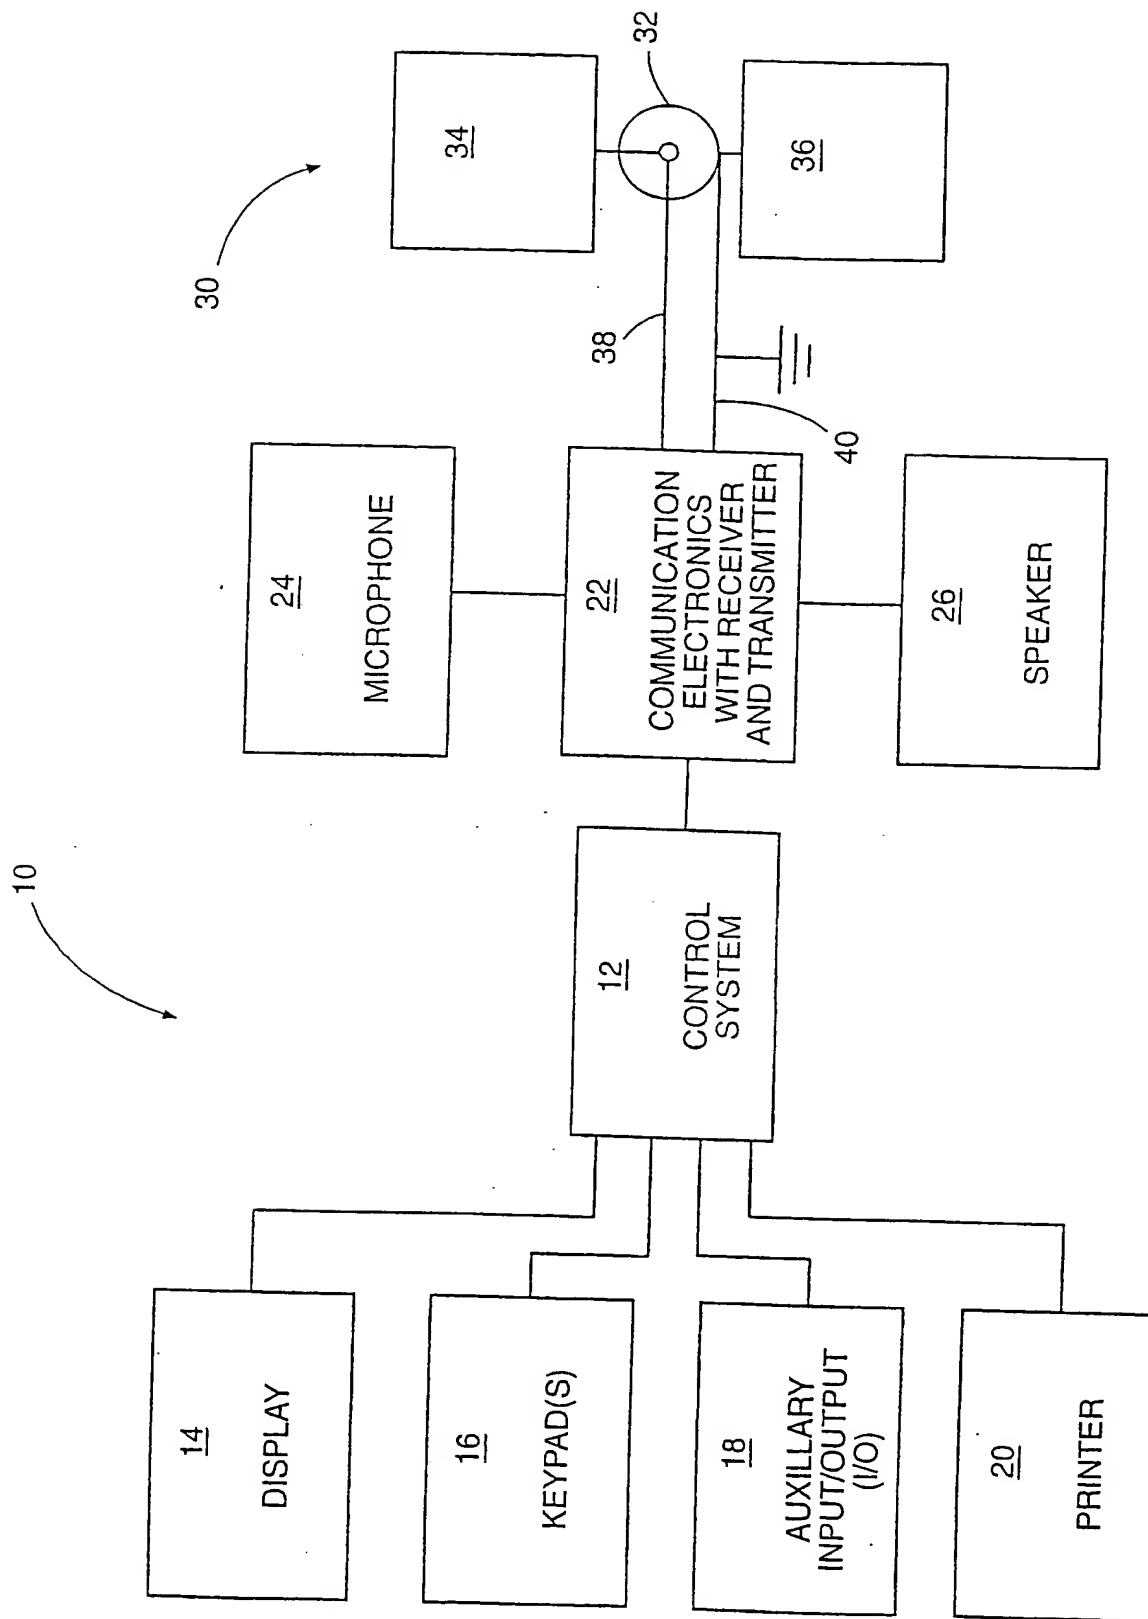
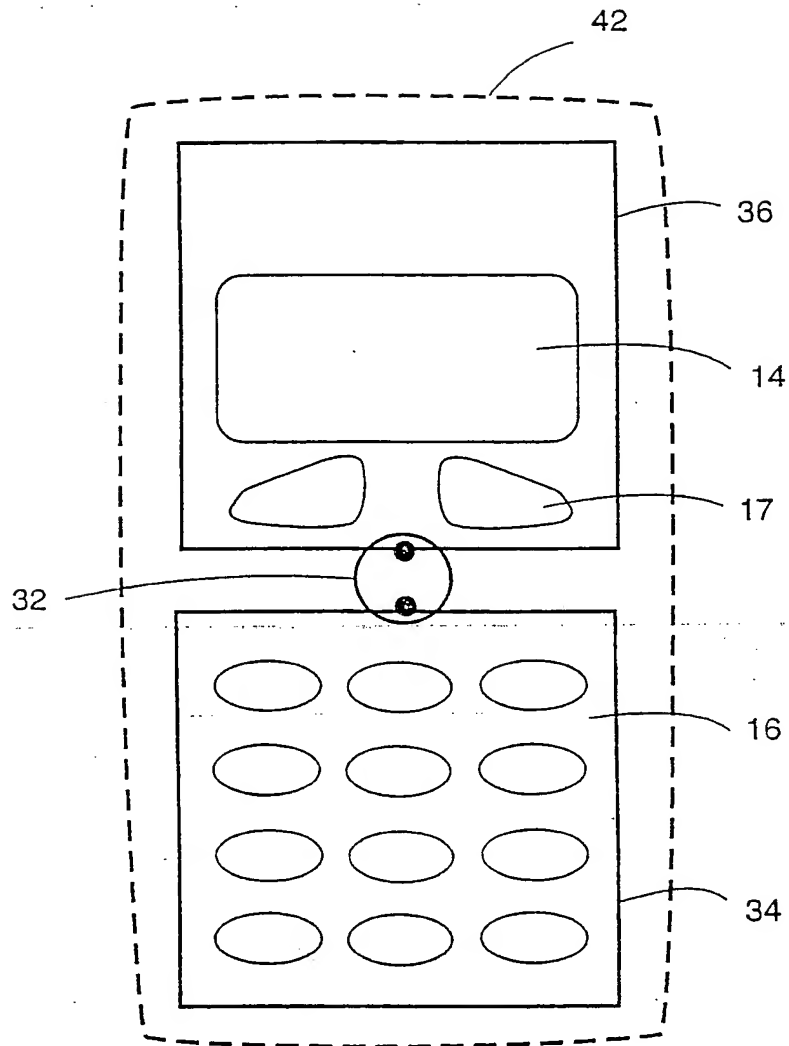
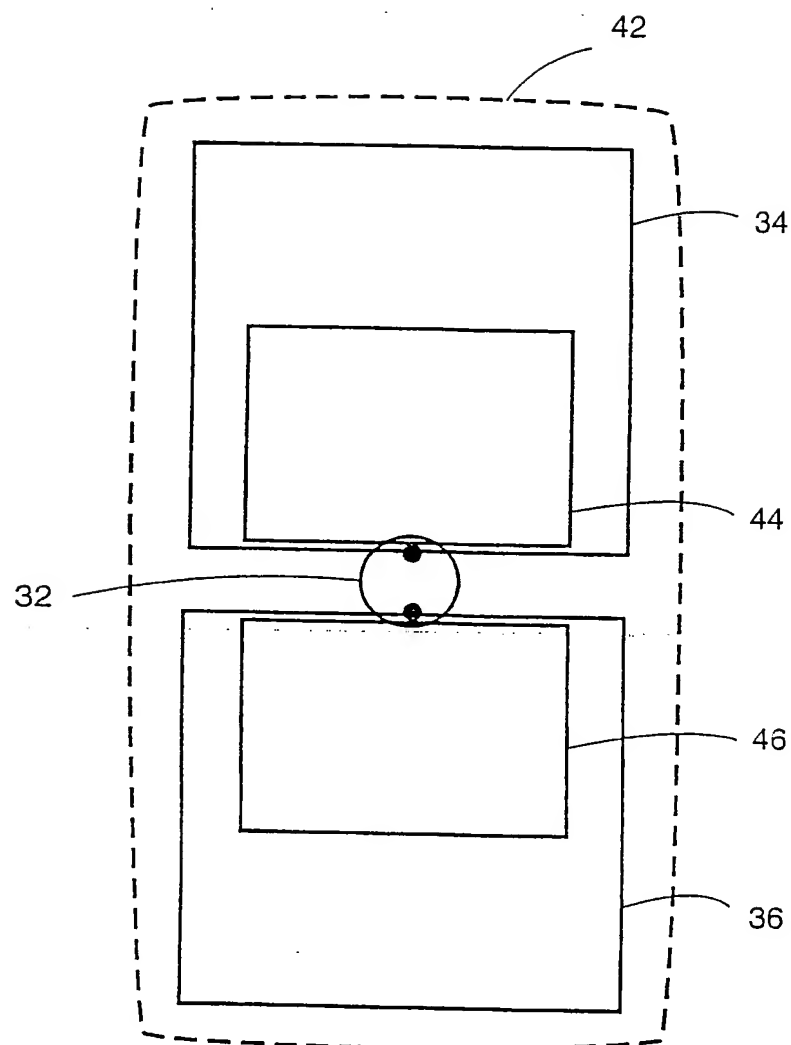
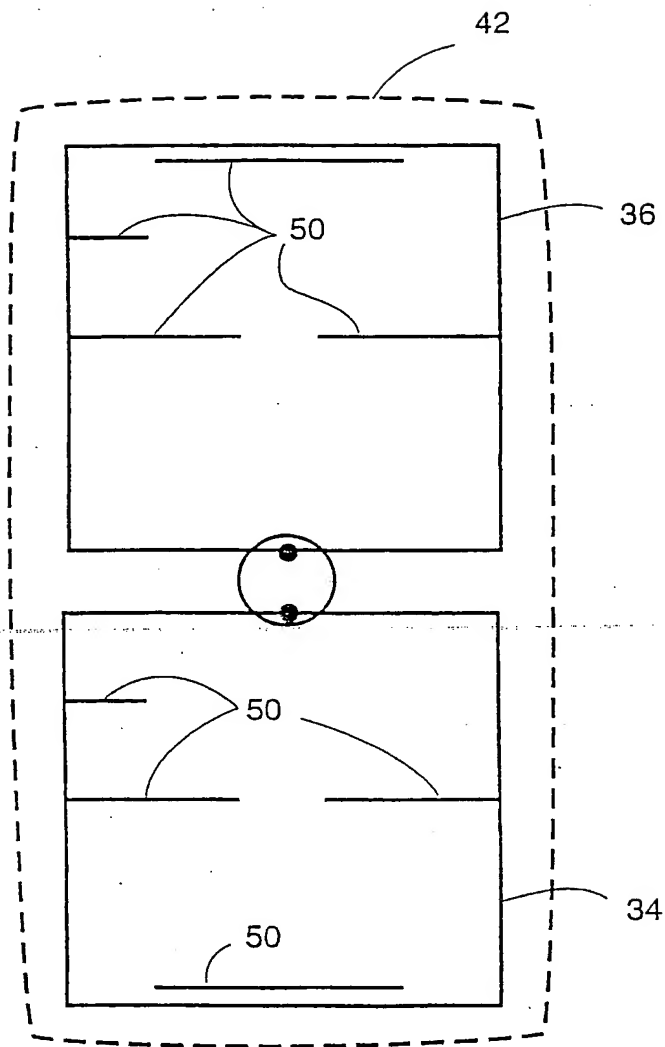


FIG. 1

**FIG. 2**

**FIG. 3**

**FIG. 4**

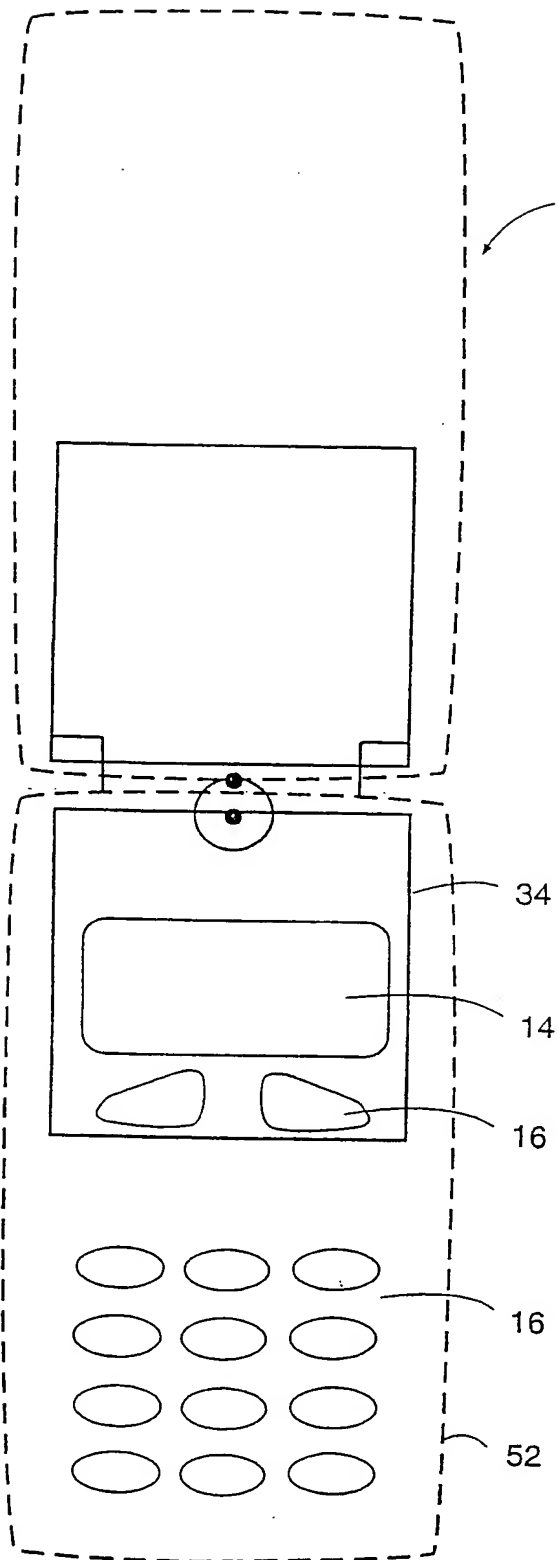


FIG. 5

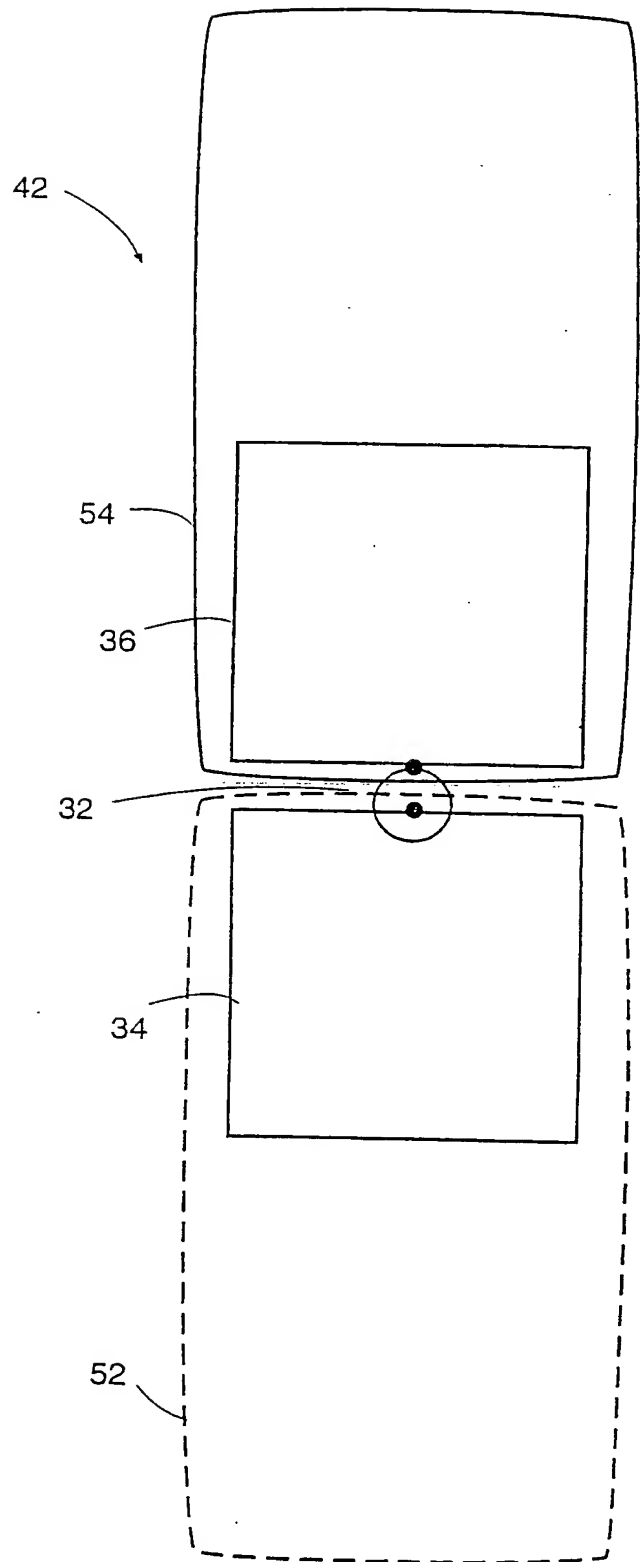


FIG. 6

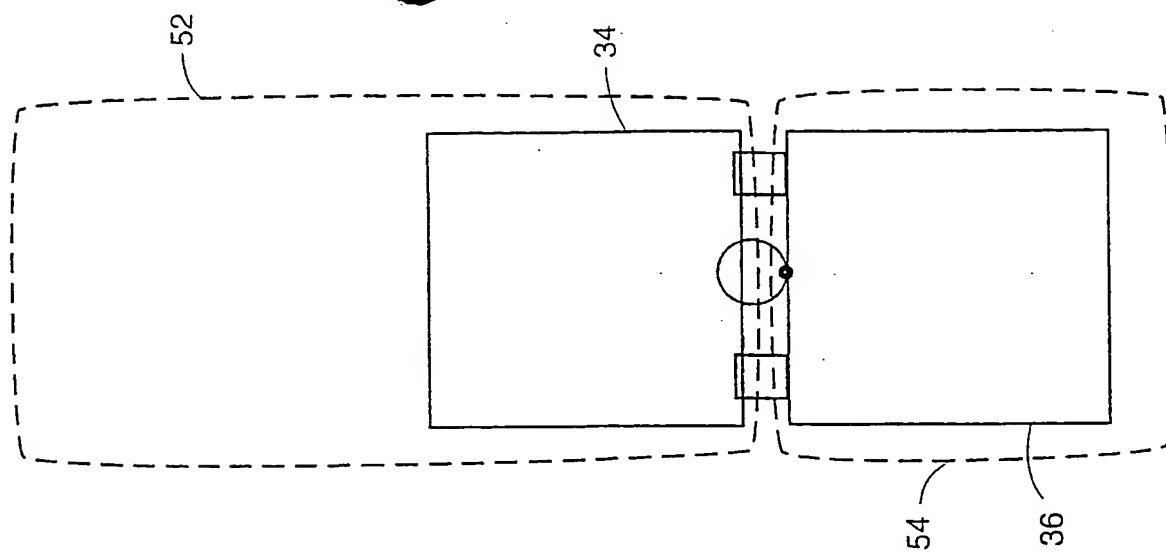


FIG. 9

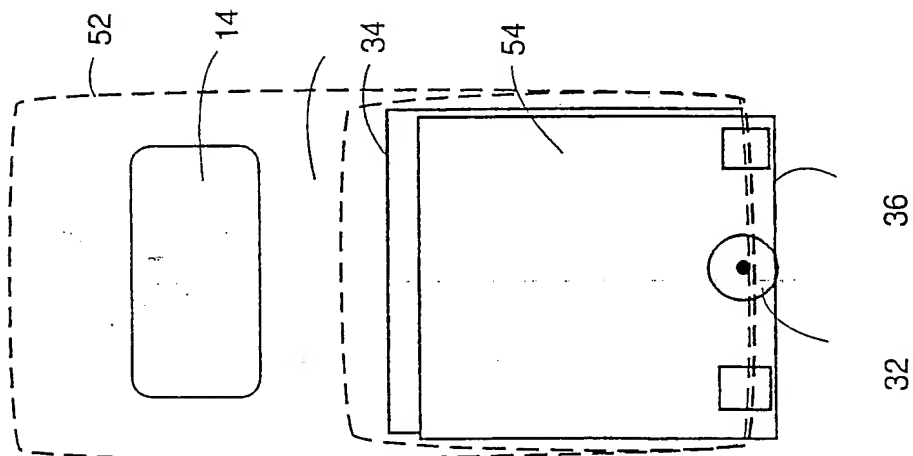


FIG. 8

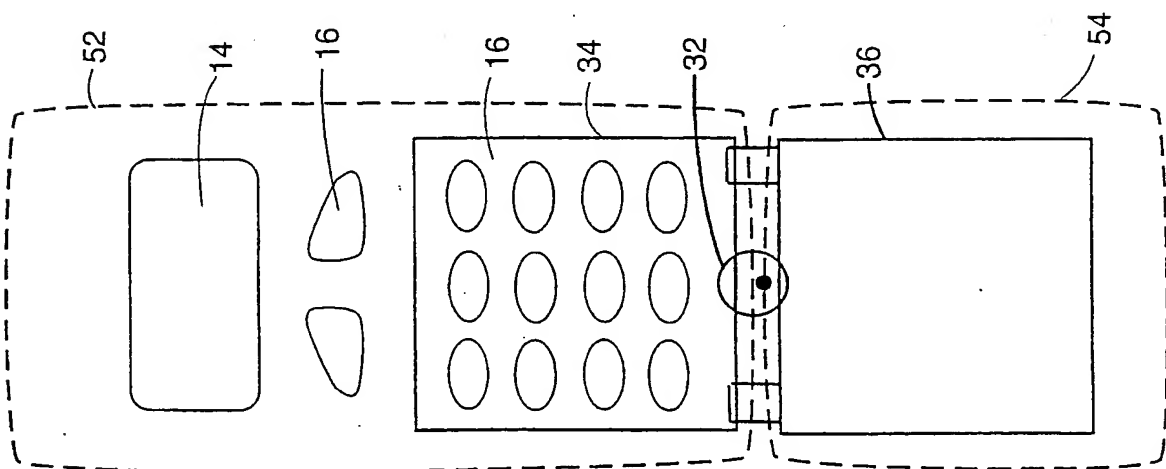


FIG. 7

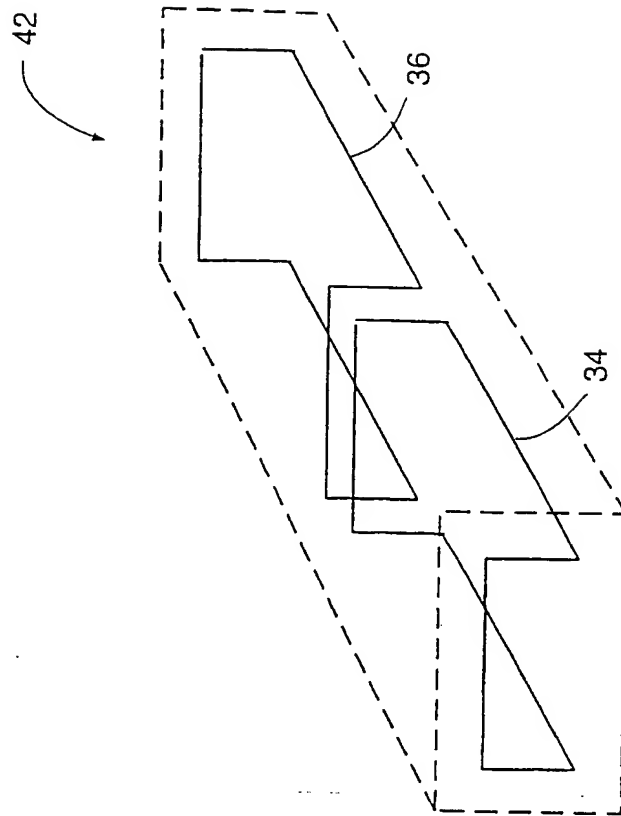


FIG. 11

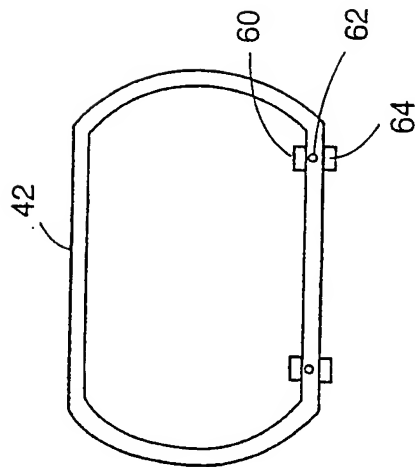


FIG. 10

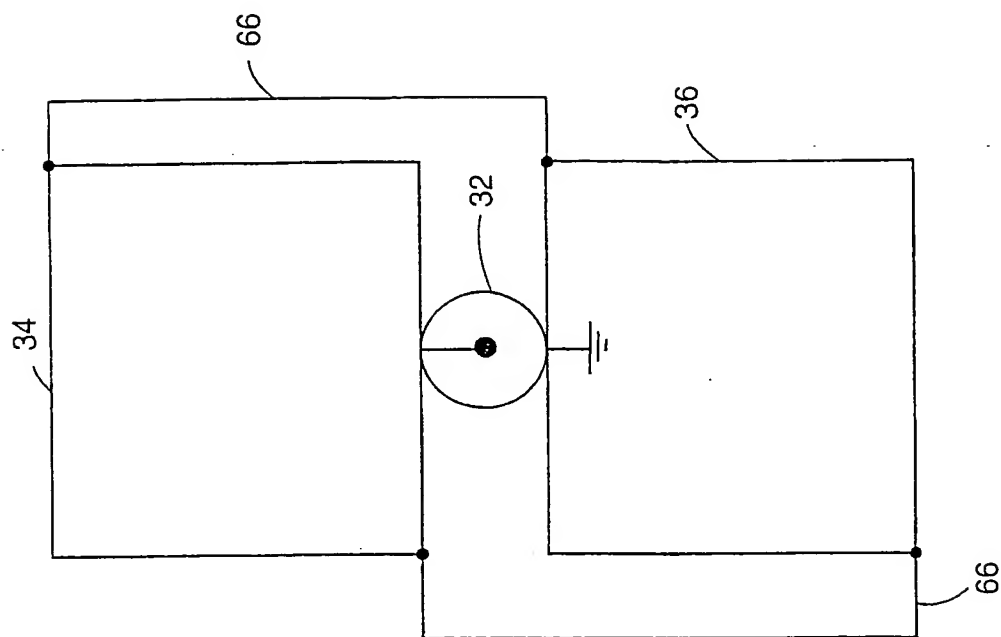


FIG. 13

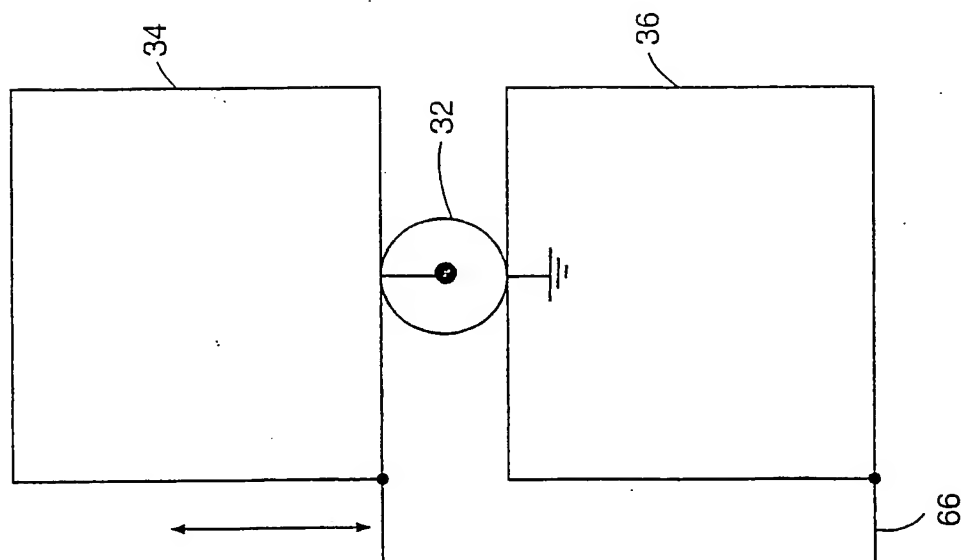


FIG. 12

INTERNATIONAL SEARCH REPORT

Int. Application No
PCT/US 99/26098

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01Q1/24 H01Q9/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	US 5 561 437 A (KRENZ ERIC L ET AL) 1 October 1996 (1996-10-01) column 3, line 27 -column 4, line 2; figure 5	1-5, 8, 13, 14, 16, 17
Y A	US 5 451 965 A (MATSUMOTO WATARU) 19 September 1995 (1995-09-19) column 4, line 13-57 column 8, line 8-11; figures 1A-1C, 7A-7B	6, 7, 9-12, 15, 18-22 1-5, 8, 13, 14, 17 9
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

1 February 2000

Date of mailing of the international search report

17/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer:

Ribbe, J

International Application No

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Patent Application No

PCT/US 99/26098

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5561437	A	01-10-1996	BR 9504663 A	08-10-1996
			CA 2156353 A	16-03-1996
			CN 1130854 A	11-09-1996
			DE 19532127 A	28-03-1996
			FR 2724771 A	22-03-1996
			GB 2293275 A, B	20-03-1996
			JP 8097622 A	12-04-1996
			SG 32495 A	13-08-1996
US 5451965	A	19-09-1995	JP 6097713 A	08-04-1994
GB 1267089	A	15-03-1972	DE 1766948 A	23-09-1971
			DE 2145294 A	22-03-1973
			FR 2015845 A	30-04-1971
US 5557293	A	17-09-1996	NONE	
US 5258892	A	02-11-1993	NONE	
US 5771445	A	23-06-1998	JP 2624198 B	25-06-1997
			JP 8130403 A	21-05-1996
			CN 1128907 A	14-08-1996